


ALLONE

LOG DEVICE

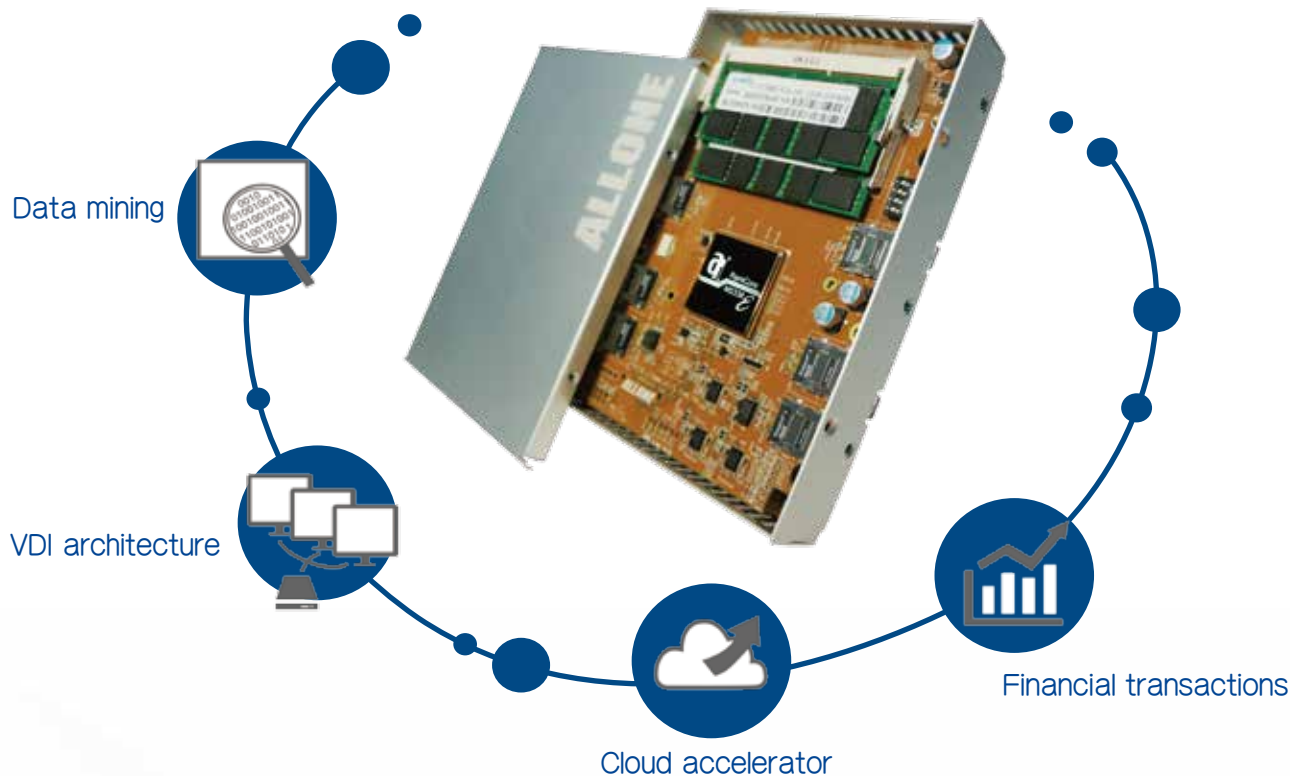

Bus Interface : SATA 3.0
Performance : 530MB/s

Capacity : Up to 64GB
IOPS : 220,000+

Accelerating I/O Delivery with Log Device

